



# 11.6<sub>in</sub>

Android signage display. Plays with no internet and no subscription.

## Screen

|                              |                                                                         |
|------------------------------|-------------------------------------------------------------------------|
| Screen                       | 11.6 in, 16:9, 1920 x 1080                                              |
| Standard brightness          | 300 nits                                                                |
| Brightness options           | Standard, Sunlight-Readable, Auto Brightness Sensor + Sunlight-Readable |
| Touch options                | Capacitive, Resistive, no touch                                         |
| Contrast                     | 1000:1                                                                  |
| Viewing angle, L / R / U / D | 85 / 85 / 85 / 85 degrees                                               |
| Colours                      | 16.7M                                                                   |


## Mechanical, mm

|               |               |
|---------------|---------------|
| Outside       | 323.7 x 218.5 |
| Depth         | 51.5          |
| Panel cut-out | 311.7 x 206.5 |

## System

|                  |                                                                                                |
|------------------|------------------------------------------------------------------------------------------------|
| Computer         | RK3568, Android                                                                                |
| Software         | IMD Signage Player, free to load, no subscription                                              |
| Playback         | Images and MP4 from microSD or USB, kept in internal memory                                    |
| Network          | 10/100/1000 Ethernet; Wi-Fi antenna                                                            |
| Ports            | 2 x USB 3.0, HDMI out up to 4K, audio in/out, 1 x RS232                                        |
| Power            | 12 to 36 V DC through the terminal adapter in the box. AC adapter sold separately. 18 W static |
| Operating        | -10 °C to 60 °C                                                                                |
| Storage          | -20 °C to 70 °C                                                                                |
| Humidity         | 95% non-condensing                                                                             |
| Front protection | IP65, front face only                                                                          |
| VESA             | 75 x 75 and 100 x 100, M4                                                                      |
| Warranty         | 3 years, parts and labor                                                                       |

## Dimensions, mm

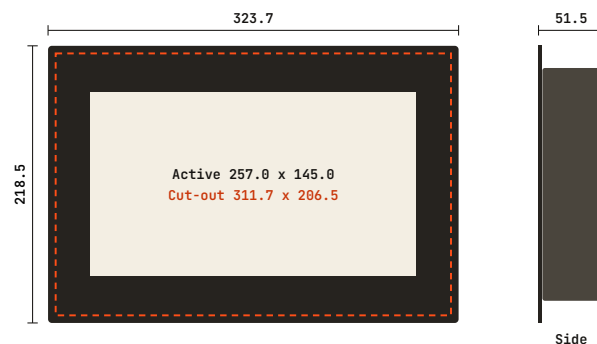

Check the depth and the cut-out against your site before you cut. STEP and GLB models: [imdsignage.com/downloads/](https://imdsignage.com/downloads/)