21.5 in

Android signage display. Plays with no internet and no subscription.

Screen

Screen	21.5 in, 16:9, 1920 x 1080
Standard brightness	300 nits
Brightness options	Standard, Sunlight-Readable, Auto Brightness Sensor + Sunlight-Readable
Touch options	Capacitive, Resistive, no touch
Contrast	1000:1
Viewing angle, L / R / U / D	89 / 89 / 89 / 89 degrees
Colours	16.7M

Mechanical, mm

Outside	557 x 345
Depth	63
Panel cut-out	540.6 x 328.6

System

Computer	RK3568, Android
Software	IMD Signage Player, free to load, no subscription
Playback	Images and MP4 from microSD or USB, kept in internal memory
Network	10/100/1000 Ethernet; Wi-Fi antenna
Ports	2 x USB 3.0, HDMI out up to 4K, audio in/out, 1 x RS232
Power	12 to 36 V DC through the terminal adapter in the box. AC adapter sold separately. 18 W static
Operating	-10 °C to 60 °C
Storage	-20 °C to 70 °C
Humidity	95% non-condensing
Front protection	IP65, front face only
VESA	75 x 75 and 100 x 100, M4
Warranty	3 years, parts and labor

Dimensions, mm

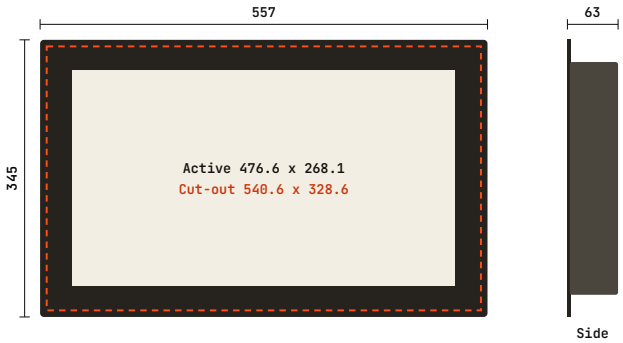

Check the depth and the cut-out against your site before you cut. STEP and GLB models: imdsignage.com/downloads/